

AS5976-01

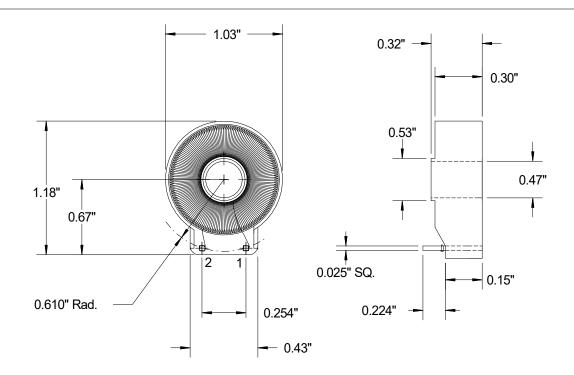

Schematic



Notes:

- 1. Core: MMC 5002
- 2. Winding: 1000T #40 Awg, 155°C
- 3. DCR: 75 Ohms Nominal
- 4. Bracket Material Nylon 6/6 Glass Filled
- 5. Alternate pin configurations and number of turns are available upon request.

| REVISIONS | | MATERIAL | | | | | | | | |
|--|---|--|-------------------|-------------------|-----------|---------|-------------|-----|---|----|
| Rev 02 - Added DCR and bracket material specifications. D. Rollins - 9-28-09 | | FINISH | | C.A. SPALDING CO. | | | | | | |
| | | D. Rollins APPROVED | DATE 4-13-09 DATE | Gl | FCI SE | ENS | SOF | R C | C | IL |
| | | | | | | | | | | - |
| COPIES ARE ISSUED IN ST | | TOLERANCES THOUSANDTHS ± .005 HUNDREDTHS ± .02 ANGLES ± .5° LINE ESS CITUEDDWISE SPECIFIED | | A | | 5 NUMBE | 76-0 | 1 | | 02 |
| COPIES ARE ISSUED IN STI NOT BE REPRODUCED OR FOR THE MANUFACTURE | RICT CONFIDENCE AND SHALL COPIED OR USED AS THE BASIS OR SALE OF APPRATUS | THOUSANDTHS ± .005 HUNDREDTHS ± .02 | | A SIZE | — DRAWING | G NUMBE | R | | | |